



STRONG AND RELIABLE TO PERFORM ON ANY ROAD






Featuring the all-new three-axle 6x4 version for enhanced traction and sustained performance in long distance haulage, the Performer truck series is ready to challenge any load as well any road, transport and weather condition. Because when the going gets tough, a Performer always delivers.

SOME APPLICATIONS FOR PERFORMER:

- General cargo with 2 or 3 axle semitrailer
- Container transport
- Water and fuel tankers up to 50,000 litres
- Flatbed for machinery transport
- Cement transport semitrailer

PRODUCT ADVANTAGES

- Reliability: Cursor 13 engine with waste gate technology
- Power: 420 horsepower with a maximum torque of 1900 Nm
- Safety: disk brakes with EBL system
- Economy: single reduction rear axle for high commercial speed and reduced fuel consumption
- Payload: 2 inches Jost 5th wheel for up to 60 ton G.c.w.
- Comfort: spacious cab with bunk, low or high roof, air conditioning, external sun visors
- **Sturdiness**: high resistance steel chassis frame 7.7 mm thick with semielliptic suspensions
- Functionality: 315/80 R 22.5 mixed route tyres with manual or automated gearbox
- Aerodynamics: roof spoiler and side deflectors











VERSIONS

New Iveco Performer is now available in 4x2 and 6x4 tractor versions, providing a perfect combination for any challenging on road mission, combining strength, reliability and maximum comfort to match all possible customer's requirements. Its on-road personality can be adapted according to specific transport applications and driver needs, from essential basic configurations to full content versions. The comfort on board can be increased with a large set of additional optionals. Space in the cab can be enlarged with the choice of the high roof version. Driveability can be adapted with mechanical or automated Eurotronic gearboxes.

BASIC	FULL						
Tractor configuration complete with all necessary features. Practical and functional.	Configuration with additional optionals included. Available with both low or high roof. Comfortable and all included.						
BASIC	PERFORMER LOW ROOF FULL	HIGH ROOF FULL					
100 mm plate for fifth wheel							
Fifth wheel 2" H = 185 mm							
530 litres fuel tank on 4x2 / 600 litres fuel tank on 6x4							
Plastic front bumper							
Jost fifth wheel							
315/80 R 22.5 mixed route							
External sunvisor							
7+7 pin trailer plug							
Air conditioner							
-	Roof spoiler	Adjustable roof spoiler in color cab					
-	Heated electric mirror						
-	Cab air suspension						
-	Radio bluetooth						
-	Additional head and fog lights						












TECHNICAL DATA

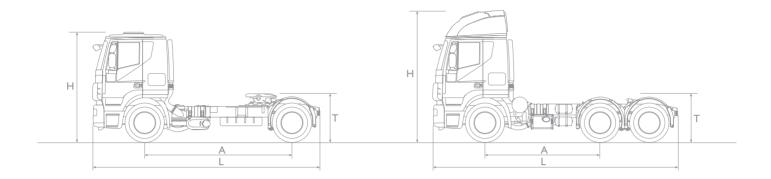

MODELS	4 X 2			6X4		
VERSION	BASIC	LOW ROOF FULL	HIGH ROOF FULL	BASIC	LOW ROOF FULL	HIGH ROOF FULL
DIMENSIONS (mm)						
(A) WHEELBASE	3800			3200		
(L) LENGHT	6286			6844		
(T) 5 th W.HEIGHT UNLOADED	1442			1440		
(T) 5 th W.HEIGHT LOADED	1278			1275		
(H) OVERALL HEIGHT	3060	3660	3640	3060	3660	3640
KERBWEIGHT (kg)	6970	6970	7080	9301	9306	9421
ENGINE	FPT CURSOR 13			FPT CURSOR 13		
CYLINDERS (n° / L)	6 in line. / 12.88			6 in line. / 12.88		
MAX. POWER (HP / kW)	420 / 309			420 / 309		
MAX. TORQUE (Nm / kg.m)	1900 / 194			1900 / 194		
emission level	EURO 3			EURO 3		
GEARBOXES	16 SPEEDS			12-16 SPEEDS		
MECHANICAL	ZF 16 S 2220 TO			-		
EUROTRONICS 12 SPEEDS	-			ZF 12 AS 2330TO		
EUROTRONICS 16 SPEEDS	ZF 16 AS 2630 TO			ZF 16 AS 2630 TO		
BRAKES	Front and rear disc / ABS + EBL			Front and rear disc / ABS + EBL		
suspension	Front and rear parabolic			Front and rear parabolic		
FUEL TANK (L)	530			600		
BATTERIES (n° / V / Ah)	2 / 12 / 170			2 / 12 / 170		
REAR AXLE RATIO	3.36			3.4		
TYRES	315/80 R 22.5			315/80 R 22.5		
AIR COMPRESSOR	352 CC single cylinder			352 CC single cylinder		

^{(*):} All models but rigids on road are available in both LHD nad RHD versions



IVECO S.p.A. - VIA PUGLIA, 35 - 10156 TORINO - ITALY

The information and images contained in this catalogue are provided by way of example. Iveco reserves the right to make changes for any commercial or construction reasons at any time without notice.



